

# WRAPCure Certified


Waste Resin Axial Printing  
with DLP Curing



# Solving Industry Gaps

When using DLP technology, parts are only partially cured as printed. The printed parts require a secondary UV exposure to fully cure and adhere to the material manufacturer's specifications. Onulis has identified the following critical gaps in the UV post-curing systems currently available.

Industry Gap	Description	Onulis' Solution
<b>Unwanted Heat Generation</b>	Some solutions use broad spectrum bulbs, which provide unwanted, uncontrolled heat that can warp parts. Manual part rotations are required to avoid warpage.	Onulis' system uses high-powered, focused UV lights, fully curing parts per manufacturer's specifications without emitting infrared rays that give off uncontrolled heat.
<b>Incomplete UV Part Exposure</b>	No current market offerings provide UV exposure to the bottom of parts, so manual rotation is required.	Onulis' unique system architecture simultaneously exposes all sides of a part to UV light.
<b>Manual Intervention Required</b>	All current solutions require users to manually rotate a part to cure all sides, and avoid warpage.	Onulis provides fully automatic operation.
<b>Lack of Certification, Auditing, &amp; Corrective Action</b>	Today's offerings do not support ISO 9000 Certified users by providing per unit documentation with each system to define wavelength, irradiance values, and consistency across the curing platform. There are no means to audit the system's performance over time or a solution for corrective action.	Onulis provides three key elements to ensure lifetime compliance with material manufacturer's specifications: <ol style="list-style-type: none"><li><b><u>Certification</u></b> Each WRAPCure <b>Certified</b> is measured, calibrated, and documented with individual specifications provided with each unit shipped.</li><li><b><u>Auditing</u></b> A Self Audit Kit is available for users to complete in-house audits of their system's performance. Measurement instrumentation, documentation, and a custom fixture included. This is particularly essential for companies that are ISO 9000 Certified.</li><li><b><u>Corrective Action</u></b> A UV Recharge Pack is available to easily replace a system's lights and drivers in the event a system falls out of specification.</li></ol>

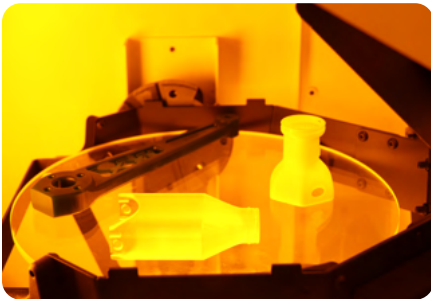

# WRAPCure Certified

## WASTE RESIN PRINT MODE

In Print Mode, the Onulis WRAPCure **Certified** automatically converts UV waste resin into fully cured plastic stock for a variety of uses and is safe for disposal as standard household waste.<sup>1</sup>

Using our patent-pending WRAP® (Waste Resin Axial Printing) technology, the system is the first technology-driven solution for handling UV waste resin, allowing users to avoid time-consuming homespun curing solutions and expensive hazardous waste outsourcing that can draw unwanted oversight from the EPA.

## DLP CURE MODE

In Cure Mode, the WRAPCure **Certified** post-cures DLP parts at production speeds. Using high-powered UV lamps and a transparent rotating curing table, WRAPCure **Certified** offers automatic and complete part curing. To ensure that the material manufacturer's specifications will be met, each WRAPCure **Certified** unit goes through a multi-step calibration, inspection, and documentation process.

## FEATURES

### WASTE RESIN PRINT MODE

- Automatic timing function and integrated safety features enable unattended operation.
- WRAPCure **Certified**'s axial printing architecture minimizes overall size and cost.
- Through leveraging used or expired resin, operation costs are virtually zero.
- Patent pending drip comb produces individual droplets for efficient curing.
- Simple gravity-driven drip system avoids use of pumps, valves, and hoses, which are susceptible to clogs.
- Onboard carbon filtration system controls fumes.

### DLP CURE MODE

- Fully automatic, hands-free operation.
- Microprocessor controlled temperature and duration avoids part warpage.
- High irradiance LED light arrays.
- Converts from Print to Cure in < 60 seconds.
- LCD user interface.
- Adjustable timing functions.
- Traceable curing.

## RELATED PRODUCTS


SELF AUDIT KIT

UV RECHARGE PACK

TOTAL CARE  
MAINTENANCE

# MACHINE SPECS

<b>Waste Printing Compatibility<sup>2</sup></b>	PolyJet, Stereolithography, & DLP
<b>Vat Capacity</b>	7.5 L
<b>Throughput</b>	Cures 30 days' worth of waste resin in 6 hrs.
<b>Printed Plastic Stock</b>	14 in. dia. x 8 in. dp. cylinder
<b>Maximum Part Size</b>	Automatic Rotation: 9.5 x 4 in. Manual Rotation: 9.5 x 11.5 x 5 in. <sup>3</sup>
<b>Curing Time</b>	5 - 30 minutes
<b>System Size &amp; Weight<sup>4</sup></b>	Standard: 26.5 x 16.5 x 28.7 in. Extended: 26.5 x 16.5 x 39.2 in. Weight: 60 lbs.
<b>Operating Conditions</b>	Temperature: 65 - 95°F (18 - 35°C)
<b>Power Requirements</b>	100 - 120 VAC, 50 - 60 Hz, 6A, 1 phase (switchable to 220)

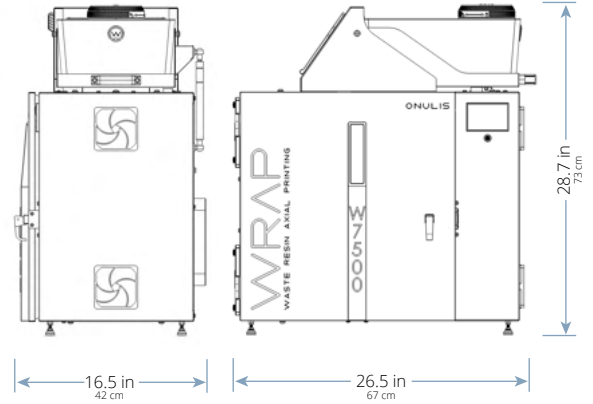

[info@onulis.com](mailto:info@onulis.com) | 650.479.9894 | [www.onulis.com](http://www.onulis.com)

- 1 Consult your local municipality to confirm disposal of hard plastic waste.
- 2 Inquire regarding unspecified materials.
- 3 Larger parts require manual rotation with optional curing table.
- 4 Clearance above machine required for loading.